





## SOLO


Design: Ronni Gol




\*Black/gold and rose gold color for indoor use only

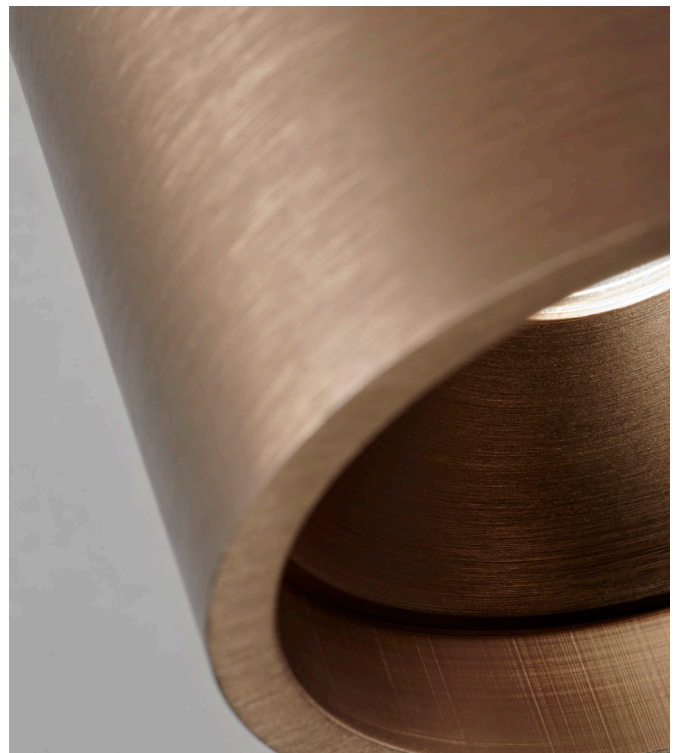

SOLO 1



SOLO 2



SOLO 3

# SOLO ROUND - 3000 K

Design: Ronni Gol

**LIGHT·POINT**  
C O P E N H A G E N

ART. NAME	SOLO ROUND 1	SOLO ROUND 2	SOLO ROUND 3
Art. no. white	258990	259020	259025
Art. no. black/white	258991	259021	259026
Art. no. black/gold	258992	-	-
EAN white	5711389589905	5711389590208	5711389590253
EAN black	5711389589912	5711389590215	5711389590260
EAN black/gold	5711389589929	-	-
Material	Aluminium / Glass	Aluminium / Glass	Aluminium / Glass
Light source	Lumems	Lumems	Lumems
Lifetime	50.000	50.000	50.000
Number of light sources	1	1	1
Electronical gear	N/A	N/A	N/A
Driver watt	N/A	N/A	N/A
Light source watt	6	10	15
System watt	6	10	15
Voltage	230V	220-240V	220-240V
Dimmable	Leading/trailing Edge	Leading/trailing Edge	Leading/trailing Edge
Lumen output	540	900	1350
Lumen pr. watt	90	90	90
Flux	281	N/A	N/A
CCT (K)	3000	3000	3000
RA/CRI	>90	>90	>90
Mac Adam	3	3	3
Light distribution	Direct	Direct	Direct
Beam angle	40	40	40
Tilt angle	N/A	N/A	N/A
Cutout mm.	N/A	N/A	N/A
Rotation	N/A	N/A	N/A
Looping	No	No	No

Updated 10th of July 2020

# SOLO ROUND - 2700 K

Design: Ronni Gol

**LIGHT·POINT**  
C O P E N H A G E N

ART. NAME	SOLO ROUND 1	SOLO ROUND 2	SOLO ROUND 3
Art. no. white	270210	270190	270200
Art. no. black/white	270211	270191	270201
Art. no. rose gold	270212	270192	-
EAN white	5711389702106	5711389701901	5711389702007
EAN black/white	5711389702113	5711389701918	5711389702014
EAN rose gold	5711389702120	5711389701925	-
Material	Aluminium / Glass	Aluminium / Glass	Aluminium / Glass
Light source	Lumems	Lumems	Lumems
Lifetime	50.000	50.000	50.000
Number of light sources	1	1	1
Electronical gear	N/A	N/A	N/A
Driver watt	N/A	N/A	N/A
Light source watt	6	10	15
System watt	6	10	15
Voltage	230V	220-2400V	220-2400V
Dimmable	Leading/trailing Edge	Leading/trailing Edge	Leading/trailing Edge
Lumen output	540	900	1350
Lumen pr. watt	90	90	90
Flux	281	N/A	N/A
CCT (K)	2700	2700	2700
RA/CRI	>90	>90	>90
Mac Adam	3	3	3
Light distribution	Direct	Direct	Direct
Beam angle	40	40	40
Tilt angle	N/A	N/A	N/A
Cutout mm.	N/A	N/A	N/A
Rotation	N/A	N/A	N/A
Looping	No	No	No

Updated 10th of July 2020