### PINOLITE 2

PRODUCT DATASHEET

**MEGAMAN®** 

L600 1000lm 9W 3000K

### FIB75600v0+830+WH



#### **PRODUCT FEATURES**

- Energy saving LED linear batten to replace conventional T5 Batten
- Tool-less installation. Plug-and-play connection
- Long life, low maintenance cost
- Durable and economical solution
- Offers various lengths for flexible solutions: 0.3m, 0.6m, 0.9m, 1.2m and 1.5m
- Integrated connector makes allows easy in line connection for continuous runs
- Translucent end caps reduce dark zones
- · Built in ON/OFF switch
- Accessories included: patch cord, mounting clips, power cord and continuous connector
- Optional accessories: adjustable mounting clips can be adjustable
   90º with adjustable mounting clips



### **APPLICATIONS**

- Display Shelves
- Light Troughs
- Offices
- · Shops and Boutiques
- Wall Lighting

# PINOLITE 2

FIB75600v0+830+WH



### PRODUCT DATASHEET

L600 1000lm 9W 3000K

RODUCT INFORMATION				
Model Number	FIB75600v0			
Product Code	FIB75600v0+830+WH			
MM Code	MM11117			
ELECTRICAL INFORMATION				
Input Voltage	220-240 VAC			
Input Current	50 mA			
Power	9 W			
Power Factor	>0.9			
Inrush Current	2.17 A			
Inrush Duration	60~150 μs			
DIMMING AND CONTROLS				
Dimmability	Non-Dim			
PHOTOMETRICAL INFORMATION				
Luminous Flux	1000			
Luminous Efficacy	111 lm/W			
Colour Temp	3000 K			
CRI	≥ Ra80			
Colour Consistency	≤6			
Max. intensity	270			
Central intensity	270			
Flickering	≤3% @100Hz			
SVM	≤ 0.4			
Pst LM	≤1.0			
LIFE PERFORMANCE				
Lifetime	30,000hrs L70B50@Ta25°C			
Number of Switching Cycles	100000			
STANDARDS AND APPLICATION				
Protection Class	CL II			
Glow Wire	650 °C			
Working Temperature	-30 to +40 °C			
Energy Class	A+			
Standards Compliance	IEC/EN60598-1, IEC/EN60598-2-1			
INSTALLATION AND CAPABILITIES				
Min. Distance from Lighted Object	0.1 mm			
B10	76			
B16	121			
C10	126			
C16	164			

## PINOLITE 2



### PRODUCT DATASHEET

L600 1000lm 9W 3000K

### FIB75600v0+830+WH

Optics Material	Polycarbonate		
Housing Material	Polycarbonate		
Housing Colour	WH13		
Length	600 mm		
Width	24 mm		
Height	35 mm		
Weights	122 g		

### **OPTIONAL ACCESSORIES**

Model No.	MM Code	Description			
LA8126	-	Adjustable mounting  Patch cord			
LA8132	-				
-	-	Default accessories			








LA8126

LA8132

Default accessories

### PHOTOMETRIC DIAGRAM

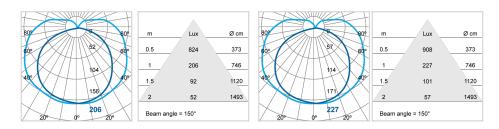

### LOGISTIC INFORMATION

MM Code	Packaging Unit	Outer Box Dimensions			Gross Weight per Outer Box
		L	W	Н	
	pcs/unit	mm	mm	mm	kg
MM11117	30	664	252	163	6.6