




PRODUCT FEATURES

- Energy saving LED linear batten to replace conventional T5 Batten
- Tool-less installation. Plug-and-play connection
- Long life, low maintenance cost
- Durable and economical solution
- Offers various lengths for flexible solutions: 0.3m, 0.6m, 0.9m, 1.2m and 1.5m
- Integrated connector makes allows easy in line connection for continuous runs
- Translucent end caps reduce dark zones
- Built in ON/OFF switch
- Accessories included: patch cord, mounting clips, power cord and continuous connector
- Optional accessories: adjustable mounting clips can be adjustable 90° with adjustable mounting clips

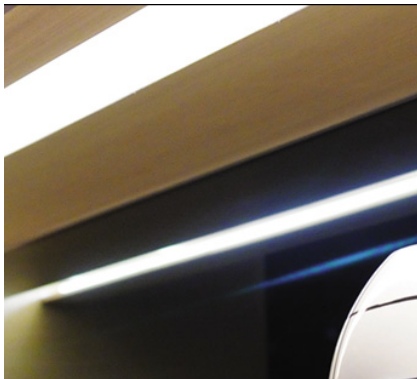

APPLICATIONS

- Display Shelves
- Light Troughs
- Offices
- Shops and Boutiques
- Wall Lighting

FIB75800v0+840+WH

PRODUCT INFORMATION

Model Number	FIB75800v0
Product Code	FIB75800v0+840+WH
MM Code	MM11120

ELECTRICAL INFORMATION

Input Voltage	220-240 VAC
Input Current	85 mA
Power	16 W
Power Factor	>0.9
Inrush Current	5 A
Inrush Duration	60~150 μ s

DIMMING AND CONTROLS

Dimmability	Non-Dim
-------------	---------

PHOTOMETRICAL INFORMATION

Luminous Flux	2150
Luminous Efficacy	134 lm/W
Colour Temp	4000 K
CRI	\geq Ra80
Colour Consistency	\leq 6
Max. intensity	420
Central intensity	420
Flickering	\leq 3% @100Hz
SVM	\leq 0.4
P _{ST} LM	\leq 1.0

LIFE PERFORMANCE

Lifetime	30,000hrs L70B50@Ta25°C
Number of Switching Cycles	100000

STANDARDS AND APPLICATION

Protection Class	CL II
Glow Wire	650 °C
Working Temperature	-30 to +40 °C
Energy Class	A++
Standards Compliance	IEC/EN60598-1, IEC/EN60598-2-1

INSTALLATION AND CAPABILITIES

Min. Distance from Lighted Object	0.1 mm
B10	33
B16	52
C10	54
C16	71

MECHANICAL AND MATERIAL

Optics Material	Polycarbonate
Housing Material	Polycarbonate
Housing Colour	WH13
Length	1200 mm
Width	24 mm
Height	35 mm
Weights	217 g

OPTIONAL ACCESSORIES

Model No.	MM Code	Description
LA8126	-	Adjustable mounting
LA8132	-	Patch cord
-	-	Default accessories



LA8126



LA8132



Default accessories

LOGISTIC INFORMATION

MM Code	Packaging Unit	Outer Box Dimensions			Gross Weight per Outer Box
		L mm	W mm	H mm	
MM11120	pcs/unit 30	1264	252	163	kg 11.2