



[ECO] _ L2T611

18w LED Tracklight

RiO[®]
LIGHT DYNAMIC

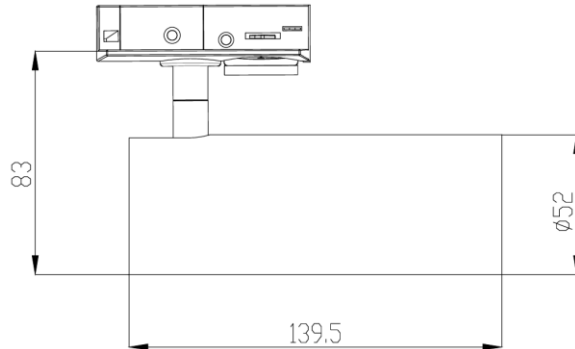

General Information

Housing Material:	Aluminium	Diffuser Material:	PC
Colour (RAL):	White(9016) - Black(9004)	Weight:	292g
Dimensions (L-W-H):	Dia.52mm – H139.5mm	Cuthole :	N/A
Connection:	Track Adapter (Single Phase)	Installation:	Track mounted
Rotation Angle:	350°	Tilting Angle:	90°
Temperature:	-20 ~ +35°C	Accessories:	N/A

Photometrical Data

LED Manufacturer:	HONGLITRONIC	LED Type:	COB
CCT:	3000K - 4000K – 6000K	CRI (Minimum):	90
lm system (±5%):	1515lm - 1651lm - 1555lm	lm source:	1760lm - 1920lm - 1808lm
Luminous Efficiency:	87lm/w – 94lm/w – 89lm/w	MacAdam:	3
Opitc:	Lens	Beam Angle:	24°/36°
UGR:	<22	LifeSpan (Ta25°C):	>50.000h - L70B50

Electrical Data

Driver:	RiO	Input Voltage:	220-240VAC 50/60Hz
Output Voltage:	135-165VDC	Output Current:	110mA
Power Factor:	>0.5	Current Ripple:	±5%
W system:	17.5W	Ballast Losses:	1.0W
Control:	ON/OFF	Minimum Dimming:	N/A