

# PRODUCT DATASHEET

**Model: L2TN714 L3TN714**

Category: LED Tracklight

Description: 30W LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: Matte White/ Black/ Satin Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire

IP Rating: 20

Working Temperature (°C): -5- +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 125

Diameter (mm): 85

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

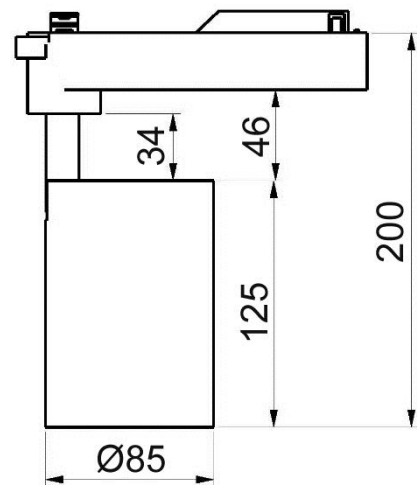

## Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.08

Gross weight per carton (kgs): 14.2

## Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

**Model: L2TN714 L3TN714**

Category: LED Tracklight

Description: 30W LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	System Lumen	Lumen per Watt
2700	90	1499	49
3000	90	1578	52
4000	90	1685	55

LED Manufacturer: Bridgelux

LED Type: COB

LED Model: BXKC-30G2000-C-13

Optic: Reflector

Beam Angle (°): 17/24/36

## Electrical Information

System Power (w): 30

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 34-40

Current (mA): 700

Non-Dimmable: RiO Non-Dimmable driver

Power Factor: 0.95

Efficiency (%): 88

Total Harmonic Distortion (%): <20

Ripple (%): <7