

# PRODUCT DATASHEET

## Model: LTM514

Category: LED Tracklight

Description: 10w LED Tracklight



## General Information

Material: Aluminum

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 60

Track System: Available in single wire, 3 wire

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): 80

Diameter (mm): 55

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

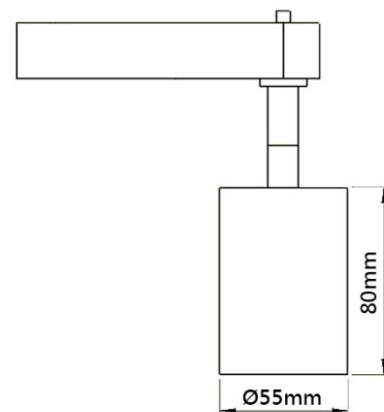

## Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.0384

Gross weight per carton (kgs): 8.3

## Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

## Model: LTM514

Category: LED Tracklight

Description: 10w LED Tracklight



## Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	657	62
3000	90	90	688	65
4000	90	90	731	69
5000	90	90	749	71

LED Manufacturer: Bridgelux

LED Type: COB

LED Model: BXKC-30G1501-D-13

Optic: Reflector

Beam Angle (°): 25

## Electrical Information

System Power (w): 10

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 16.2-19.6

Current (mA): 500

Non-Dimmable: RiO Non-dimmable Driver

Power Factor: 0.92

Efficiency (%): 85

Total Harmonic Distortion (%): <15

Ripple (%): ±3

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request