

# PRODUCT DATASHEET

## Model: LXD110

Category: LED Recessed Linear Downlight

Description: 20w LED Recessed Linear Downlight



## General Information

Material: Aluminum + Ferrum

Fitting Colors: Matte White/ Black

Rotation Angle (degree): Not Applicable

Tilting Angle (degree): Not Applicable

Track System: Not Applicable

IP Rating: 20

Working Temperature (°C): -20 - +32

Storage Temperature (°C): -20 - +50



## Product Dimensions and Cut-out Information


Fitting Length (mm): Not Applicable

Diameter (mm): 280 x 45

Height (mm): 49

Cut-out Dimension (mm): 270 x 32

Dimension:

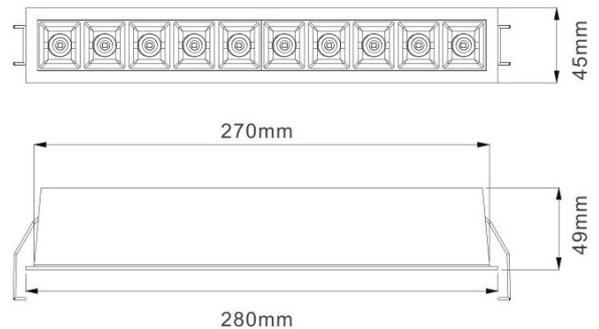

## Packing Information

Packaging Type: Individual box

Quantity per carton: 15

CBM per carton: 0.026

Gross weight per carton (kgs): 6.7

## Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

# PRODUCT DATASHEET

## Model: LXD110

Category: LED Recessed Linear Downlight

Description: 20w LED Recessed Linear Downlight



## Light Technical Information

Color Temperature	CRI (Ra)	System Lumen	Lumen per Watt
2700	95	1404	61
3000	95	1518	66
4000	95	1746	76

LED Manufacturer: Luminus

LED Type: SMD

LED Model: SST-20

Optic: Reflector

Beam Angle (°): 15/30/45

## Electrical Information

System Power (w): 23

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 28-30

Current (mA): 700

Non-Dimmable: LC 30W 700mA fixC SC ADV

Power Factor: 0.95

Efficiency (%): 88

Total Harmonic Distortion (%): <20

Ripple (%): ±5

Dimmable: Triac Dimming – Upon Request

1-10V Dimming – Upon Request

Dali Dimming – Upon Request